UHF On-Metal RFID PCB Tag IDTS-1604-20 (16 × 4 × 2 mm)

Model IDTS-1604-20 · Brand: Identium

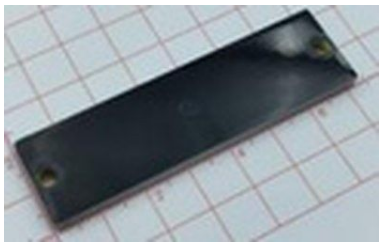

A slim 16 × 4 × 2 mm rectangular UHF RFID PCB tag with an M750 chip and a 3 mm aperture, for narrow metal tools and parts that are identified at close range, up to 80 cm.

KEY FEATURES

- **Slim 16 × 4 mm footprint, 2 mm thick**
- **Rated read range up to 80 cm**
- M750 (Impinj) chip, EPC Class 1 Gen 2 / ISO 18000-6C
- 3 mm aperture for pin, rivet or wire fixing
- 860–960 MHz, covering India's 865–868 MHz band

APPLICATIONS

Tool tracking | Narrow metal parts | Tool cribs | Jigs and fixtures | On-metal asset tracking

SPECIFICATIONS

Model	IDTS-1604-20
Type	On-metal UHF PCB tag, rectangular
Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen 2 / ISO 18000-6C
Chip	M750 (Impinj)
Read range	Up to 80 cm
Dimensions	16 × 4 × 2 mm
Aperture	3 mm
Material	PCB