UHF On-Metal RFID PCB Disc Tag IDTS-D10-20 (Ø10 × 2 mm)

Model IDTS-D10-20 · Brand: Identium

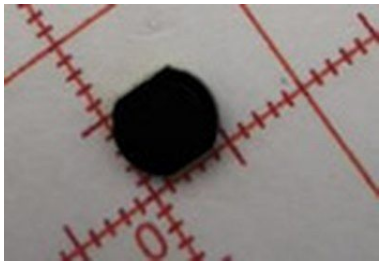

A 10 mm diameter, 2 mm thick UHF RFID PCB disc with an M4QT chip and a rated read range of up to 40 cm, for tools and small metal assets that have very little room for a tag.

KEY FEATURES

- **Ø10 mm disc, 2 mm thick**
- **Rated read range up to 40 cm**
- M4QT (Impinj Monza 4QT) chip, EPC Class 1 Gen 2 / ISO 18000-6C
- No aperture: fix with adhesive or epoxy, or set into a recess
- 860–960 MHz, covering India's 865–868 MHz band

APPLICATIONS

Tool tracking | Spanners and wrenches | Jigs and fixtures | Small metal parts | Equipment management

SPECIFICATIONS

Model	IDTS-D10-20
Type	On-metal UHF PCB tag, round disc
Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen 2 / ISO 18000-6C
Chip	M4QT (Impinj Monza 4QT)
Read range	Up to 40 cm
Dimensions	Ø10 × 2 mm
Aperture	None
Material	PCB

Specifications are indicative and may change without notice; confirm details for your order in the quotation.