UHF On-Metal RFID PCB Disc Tag IDTS-D18-25 (Ø18 × 2.5 mm, 2 mm Hole)

Model IDTS-D18-25 · Brand: Identium

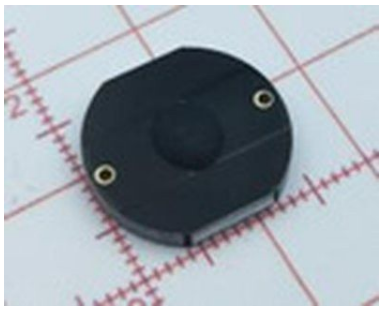

An 18 mm UHF RFID PCB disc with a 2 mm aperture for screw or rivet fixing, an H9 chip and a rated read range of up to 150 cm, for metal equipment where adhesive alone may not hold.

KEY FEATURES

- **2 mm aperture for screw or rivet fixing**
- **Ø18 mm disc, 2.5 mm thick**
- Rated read range up to 150 cm
- H9 (Alien Higgs-9) chip, EPC Class 1 Gen 2 / ISO 18000-6C
- 860–960 MHz, covering India’s 865–868 MHz band

APPLICATIONS

Machinery and gearboxes · Pumps and motors · Metal pallets and cages · Safety equipment · Tool tracking · Equipment tracking

SPECIFICATIONS

Model	IDTS-D18-25
Type	On-metal UHF PCB tag, round disc
Frequency	860–960 MHz (covers India’s 865–868 MHz band)
Protocol	EPC Class 1 Gen 2 / ISO 18000-6C
Chip	H9 (Alien Higgs-9)
Read range	Up to 150 cm
Dimensions	Ø18 × 2.5 mm
Aperture	2 mm
Mounting	Screw or rivet through aperture, or adhesive
Material	PCB

Specifications are indicative and may change without notice; confirm details for your order in the quotation.