UHF On-Metal RFID PCB Tag P1808-25 (18 × 8 × 2.5 mm)

Model IDTS-P1808-25 · Brand: Identium

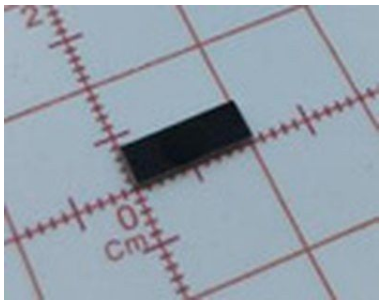

An 18 × 8 × 2.5 mm UHF PCB tag with an M4QT chip and no mounting hole, rated up to 100 cm, for bonding along narrow metal edges, frame rails and enclosures.

KEY FEATURES

- **18 × 8 × 2.5 mm narrow rectangle**
- **Rated read range up to 100 cm**
- M4QT chip, EPC Class 1 Gen2 / ISO 18000-6C
- No mounting hole; bonds flat to metal
- Fits narrow faces such as frame rails and panel edges

APPLICATIONS

Machine frames | Electrical enclosures | Racks and trolleys | Tool tracking | Asset management

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	M4QT
Read range	Up to 100 cm (depends on reader and mounting surface)
Dimensions	18 × 8 × 2.5 mm
Shape	Rectangular
Mounting	Bonded; flush, fastener-free finish
Tag type	UHF on-metal PCB tag

Specifications are indicative and may change without notice; confirm details for your order in the quotation.