UHF On-Metal PCB RFID Tag P2208-25 (22 × 8 × 2.5 mm, U8)

Model IDTS-P2208-25 · Brand: Identium

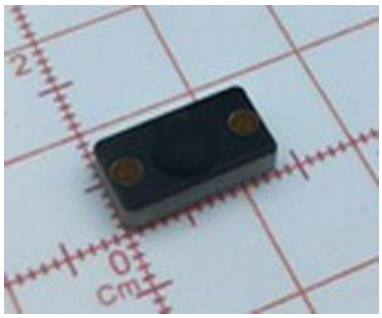

A 22 × 8 × 2.5 mm UHF PCB tag for screwing onto metal tools and site equipment, with a 2 mm mounting hole, a U8 chip and up to 200 cm read range.

KEY FEATURES

- **22 × 8 mm footprint in a 2.5 mm-thick body**
- **2 mm aperture for screw or rivet fixing**
- Reads up to 200 cm when fixed to metal
- U8 chip on the EPC Class 1 Gen2 / ISO 18000-6C standard
- Covers 860–960 MHz, including India's 865–868 MHz band

APPLICATIONS

Power tool tracking · CNC tool holders · Rental tool fleets · Site equipment

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	U8
Read range	Up to 200 cm (depends on reader and mounting)
Dimensions	22 × 8 × 2.5 mm
Mounting	2 mm aperture for screw or rivet
Material	PCB