UHF On-Metal PCB RFID Tag P2309-35 (23 × 9 × 3.5 mm, M750)

Model IDTS-P2309-35 · Brand: Identium

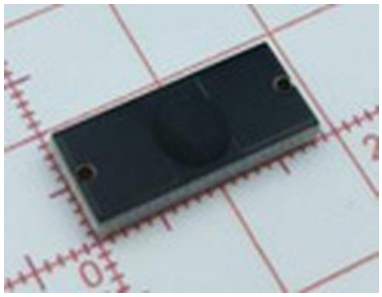

A 23 × 9 × 3.5 mm UHF PCB tag with an M750 chip for metal assets such as moulds, dies and lifting gear. It reads at up to 200 cm and fixes through a 1.5 mm hole.

KEY FEATURES

- **Deeper 3.5 mm body in a 23 × 9 mm footprint**
- **M750 chip, EPC Class 1 Gen2 / ISO 18000-6C**
- Up to 200 cm read range on metal assets
- 1.5 mm aperture for screw or rivet fixing
- 860–960 MHz, works in India's 865–868 MHz band

APPLICATIONS

Moulds and dies | Lifting tackle | Jigs and fixtures | Hydraulic couplings | Test instruments

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	M750
Read range	Up to 200 cm (depends on reader and mounting)
Dimensions	23 × 9 × 3.5 mm
Mounting	1.5 mm aperture for screw or rivet
Material	PCB