UHF On-Metal PCB RFID Tag P2509-25 (25 × 9 × 2.5 mm, M4QT)

Model IDTS-P2509-25 · Brand: Identium

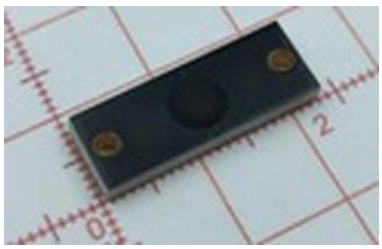

A 25 × 9 × 2.5 mm UHF PCB tag with an M4QT chip and no mounting hole, for bonding onto metal tools, gauges and enclosures you cannot drill. Reads at up to 200 cm.

KEY FEATURES

- **No aperture: bonds flat with epoxy or industrial adhesive**
- **25 × 9 × 2.5 mm slim rectangular body**
- M4QT chip, EPC Class 1 Gen2 / ISO 18000-6C
- Up to 200 cm read range on metal
- 860–960 MHz, covers India's 865–868 MHz band

APPLICATIONS

Gauges and measuring tools | Hardened cutting tools | Metal enclosures | Equipment carts | Ladders and access gear

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	M4QT
Read range	Up to 200 cm (depends on reader and mounting)
Dimensions	25 × 9 × 2.5 mm
Mounting	No aperture; bond with epoxy or industrial adhesive
Material	PCB