UHF On-Metal PCB RFID Tag P3005-10 (30 × 5 × 1 mm, U8)

Model IDTS-P3005-10 · Brand: Identium

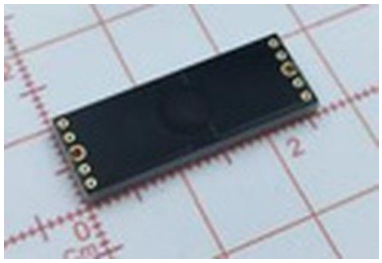

A narrow 30 × 5 × 1 mm UHF PCB strip tag with a U8 chip for slim metal parts such as tool shanks, keys and brackets. Its read range of up to 70 cm suits counter and bench checks.

KEY FEATURES

- **Only 5 mm wide and 1 mm thick, 30 mm long**
- **2 mm aperture for screw or rivet fixing**
- Up to 70 cm read range for close-range identification
- U8 chip, EPC Class 1 Gen2 / ISO 18000-6C
- 860–960 MHz, covers India's 865–868 MHz band

APPLICATIONS

Narrow tool shanks · Key management · Instrument identification · Panel brackets and rails · Counter issue and return

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	U8
Read range	Up to 70 cm (depends on reader and mounting)
Dimensions	30 × 5 × 1 mm
Mounting	2 mm aperture for screw or rivet
Material	PCB