UHF On-Metal RFID PCB Tag P3310-30 (33 × 10 × 3 mm)

Model IDTS-P3310-30 · Brand: Identium

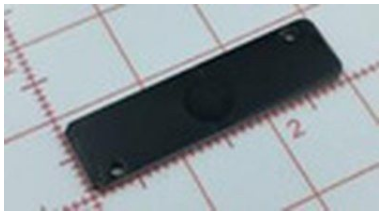

A narrow 33 × 10 × 3 mm UHF PCB tag for fixing directly onto metal tools, brackets and small fittings, with an M4QT chip, a listed read range of up to 300 cm and a 2 mm aperture.

KEY FEATURES

- **33 × 10 × 3 mm body for narrow metal faces**
- **Designed to read when fixed directly on metal**
- M4QT chip, EPC Class 1 Gen2 / ISO 18000-6C
- Listed read range up to 300 cm
- 2 mm aperture for a small screw or rivet
- 860–960 MHz, covers India's 865–868 MHz band

APPLICATIONS

Hand tool tracking · Tool crib issue and return · Jigs and fixtures · Machine brackets · Metal storage bins · Small equipment audits

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	M4QT
Read range	Up to 300 cm (depends on reader and mounting)
Dimensions	33 × 10 × 3 mm
Mounting	2 mm aperture
Type	Rectangular on-metal PCB tag