UHF On-Metal RFID PCB Tag P3613-25 (36 × 13 × 2.5 mm)

Model IDTS-P3613-25 · Brand: Identium

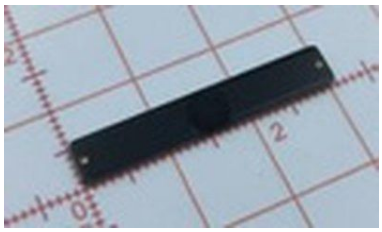

A thin 36 × 13 × 2.5 mm UHF PCB tag for metal-cased IT hardware, instruments and equipment nameplates, with an M4QT chip, a listed read range of up to 300 cm and a 1.5 mm aperture.

KEY FEATURES

- **36 × 13 mm face, only 2.5 mm thick**
- **Designed for direct mounting on metal**
- M4QT chip, EPC Class 1 Gen2 / ISO 18000-6C
- Listed read range up to 300 cm
- 1.5 mm aperture for fine screws or rivets
- Covers India's 865–868 MHz UHF band

APPLICATIONS

Server and network chassis · Test and measuring instruments · Calibrated gauges · Equipment nameplates · IT asset audits · Lab equipment registers

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	M4QT
Read range	Up to 300 cm (depends on reader and mounting)
Dimensions	36 × 13 × 2.5 mm
Mounting	1.5 mm aperture
Type	Rectangular on-metal PCB tag

Specifications are indicative and may change without notice; confirm details for your order in the quotation.