UHF On-Metal RFID PCB Tag P4010-30 (40 × 10 × 3 mm)

Model IDTS-P4010-30 · Brand: Identium

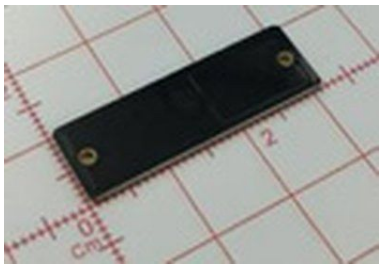

A slim 40 × 10 × 3 mm UHF PCB tag listing up to 500 cm read range from a 10 mm-wide body, with a U8 chip and a 3 mm aperture, for narrow metal parts that still need distance reads.

KEY FEATURES

- **Only 10 mm wide: 40 × 10 × 3 mm**
- **Listed read range up to 500 cm**
- U8 chip, EPC Class 1 Gen2 / ISO 18000-6C
- 3 mm aperture for screw or rivet fixing
- Designed for direct mounting on metal
- 860–960 MHz, covers India's 865–868 MHz band

APPLICATIONS

Rack and shelf uprights | Electrical panel edges | Machine frames | Steel trolleys | Pipe supports and brackets | Rental equipment

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	U8
Read range	Up to 500 cm (depends on reader and mounting)
Dimensions	40 × 10 × 3 mm
Mounting	3 mm aperture
Type	Rectangular on-metal PCB tag