UHF On-Metal RFID PCB Tag P7020-35 (70 × 20 × 3.5 mm)

Model IDTS-P7020-35 · Brand: Identium

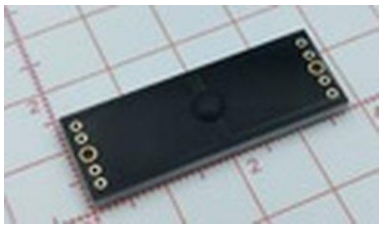

A 70 × 20 × 3.5 mm long-range UHF PCB tag for metal assets read at gates, dock doors or from across an aisle, with an H9/781 chip, up to 600 cm listed read range and a 3 mm aperture.

KEY FEATURES

- **Listed read range up to 600 cm**
- **Smallest of the three 600 cm P-series tags: 70 × 20 mm**
- H9/781 chip, EPC Class 1 Gen2 / ISO 18000-6C
- 3 mm aperture for screw or rivet fixing
- Designed for direct mounting on metal
- 860–960 MHz, covers India's 865–868 MHz band

APPLICATIONS

Dock door portals · Steel pallet cages · Roll cages and trolleys · Returnable metal racks · Material handling equipment · Yard inventory

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	EPC Class 1 Gen2 / ISO 18000-6C
Chip	H9/781
Read range	Up to 600 cm (depends on reader and mounting)
Dimensions	70 × 20 × 3.5 mm
Mounting	3 mm aperture
Type	Rectangular on-metal PCB tag