




UHF Anti-Metal RFID PCB Tag IDTS-1504 (15 × 4 × 3.5 mm, Screw Mount)

Model IDTS-1504 · Brand: Identium

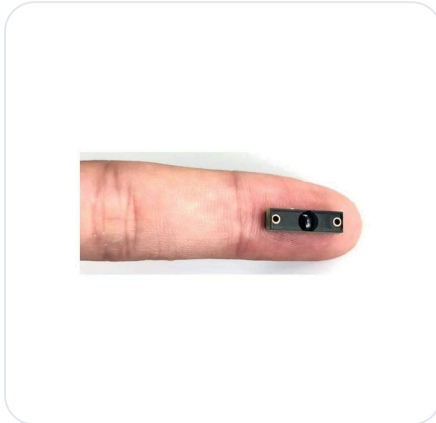

A slim 15 × 4 mm UHF anti-metal PCB stick with a through-hole at each end, made to be screwed onto narrow metal parts such as tool shanks and brackets, reading approx. 1 m on metal.

KEY FEATURES

- 15 × 4 mm footprint; 3.5 mm at the raised dome
- Through-hole at each end for screw mounting
- Approx. 1 m read range on metal
- U8 chip on ISO 18000-6C, 128-bit EPC, 96-bit TID
- Rated –20 °C to +150 °C

APPLICATIONS

Spanners and torque tools

Dies and gauges

Narrow brackets

Switchgear parts

Railway small fittings

Process plant valves

SPECIFICATIONS

Frequency	860–960 MHz (covers India's 865–868 MHz band)
Protocol	ISO 18000-6C
Chip	U8
Memory	EPC 128 bits; TID 96 bits
Read range	Approx. 1 m on metal
Dimensions	15 × 4 × 3.5 mm (3.5 mm at the raised dome)
Material	PCB
Mounting	Two through-holes for screws, one at each end (diameter not specified)
Colour	Black with green PCB edge
Operating temperature	–20 °C to +150 °C